



Three-phase Residential Hybrid Inverter



X3-HYBRID G4

5.0kW / 6.0kW / 8.0kW / 10.0kW /
12.0kW / 15.0kW



Smart Management


- VPP ready, ancillary service in power market
- Global MPP scan for optimal energy harvest
- Smart loads management(e.g., heat pump, smart EV charger)
- Intelligent ToU-driven energy management



High Performance

- 200% PV oversizing and up to 110% AC output
- Up to 97.5% efficiency in charging and discharging
- Up to 200% PV input
- Three-phase unbalanced output: Max. 5kW per phase

Efficiency Curve

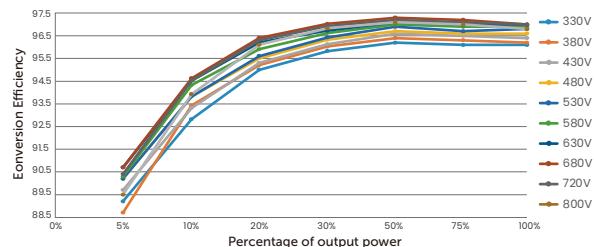

Assured Reliability

- Up to 200% EPS overload output for 10 seconds*
- UPS-level switchover time <10ms
- IP65 protection degree
- Type II SPD on AC&DC side




Flexible Adaptability

- Lithium-ion & Lead-acid battery compatible
- On-grid and off-grid parallel function, up to 150kW
- Max. 28A input per MPPT, optimized for high-power solar panels.
- Quick configuration via U-disk

*Overload capabilities vary by model. Please refer to the specification page for detailed information

Circuit Diagram

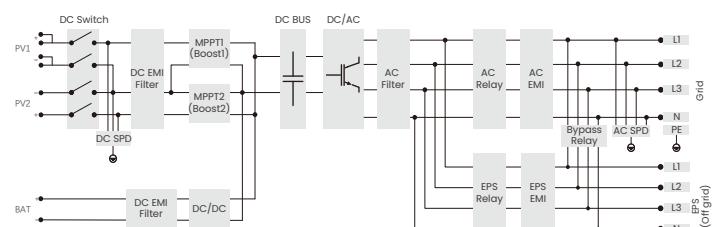

X3-HYBRID-5.0-D X3-HYBRID-6.0-D X3-HYBRID-8.0-D X3-HYBRID-10.0-D X3-HYBRID-12.0-D X3-HYBRID-15.0-D

PV INPUT								
Max. recommended PV array power	10kWp	12kWp	16 kWp	20 kWp	24 kWp	30 kWp		
Max. PV input voltage ^①				1000 V				
Nominal PV input voltage				640 V				
MPPT voltage range ^②				180 ~ 950 V				
Start-up voltage				200 V				
No. of MPP trackers / Strings per MPP tracker	2 (1 / 1)		2 (2 / 1)					
Max. input current per MPPT ^③ (MPPT1/2)	16 A / 16 A		28 A / 16 A					
Max. input short circuit current per MPPT (MPPT1/2)	20 A / 20 A		35 A / 20 A					
AC INPUT & OUTPUT (ON-GRID)								
Rated output power	5 kW	6 kW	8 kW	10 kW	12 kW	15 kW		
Rated output current	7.2 A	8.7 A	11.6 A	14.5 A	17.5 A	21.8 A		
Max. output apparent power	5.5 kVA	6.6 kVA	8.8 kVA	11.0 kVA	13.2 kVA	15.0 kVA		
Max. output continuous current	8.1 A	9.7 A	12.9 A	16.1 A	19.3 A	24.1 A		
Nominal AC voltage				3 / N / PE, 220 / 380 V 3 / N / PE, 230 / 400 V				
Max. AC input apparent power	10 kVA	12 kVA	16 kVA	20 kVA	20 kVA	20 kVA		
Max. AC input current	16.1 A	19.3 A	25.8 A	32.0 A	32.0 A	32.0 A		
Nominal AC frequency				50 Hz / 60 Hz				
Adjustable power factor range				~ 1 (0.8 lagging to 0.8 leading)				
THDi (rated power)				< 3%				
BATTERY								
Battery type	Lithium-ion battery / Lead-acid battery							
Battery voltage range ^④	120 ~ 800 V							
Max. charge / discharge current	30 A							
EPS (OFF-GRID) OUTPUT (WITH BATTERY)								
Rated EPS output voltage, frequency	400 V / 230 V, 50 Hz / 60 Hz							
Rated EPS output power	5 kVA	6 kVA	8 kVA	10 kVA	12 kVA	15 kVA		
Peak EPS output power	12.0 kVA, 10 s	12.0 kVA, 10 s	18.0 kVA, 10 s	18.0 kVA, 10 s	22.5 kVA, 10 s	22.5 kVA, 10 s		
Switchover time				< 10 ms				
EFFICIENCY								
Max. efficiency	98.0%							
European efficiency	97.7%							
ENVIRONMENT LIMIT								
Ingress protection	IP65							
Operating ambient temperature range ^⑤	-35 ~ 60°C							
Max. operating altitude	< 3000 m							
Relative humidity	4 ~ 100% RH (condensing)							
Overvoltage Category	Mains: III, Battery: II, PV: II							
GENERAL								
Dimensions (W x H x D)	503 x 503 x 199 mm							
Net weight	30 ± 1 kg							
Cooling concept	Nature cooling				Smart cooling			
Communication interfaces	CT / Meter (optional), External control RS485, Pocket WiFi (Optional: Pocket LAN/4G), DRM, NTC (optional)							
Power consumption (night)	< 40 W for standy, < 5 W for idle							
Topology	Non-isolated							
Certificates and approvals	EN/IEC62109-1/-2, VDE4105, G99, G98, AS4777, EN50549, CEI 0-21, IEC61727, PEA/MEA, NRS-097-2-1, RD1699, TOR							
AC auxiliary power supply (APS)	Built-in							
PROTECTION								
Protections	DC reverse-polarity protection, DC isolation protection, Residual current detection, AC overcurrent protection, AC short-circuit protection, Over / under voltage protection, Grid monitoring, DC injection monitoring, Back feed current monitoring, Over temperature protection							
Active anti-islanding method	Frequency shift							
Surge protection (DC / AC)	DC: Type II, AC: Type II							
Arc-fault circuit interrupter (AFCI)	Optional							

① The maximum input voltage is the upper limit of the DC voltage. Any higher input DC voltage would probably damage the inverter

② Input voltage exceeding the MPPT voltage range may trigger inverter protection

③ When PV1 is connected to 2 strings, the maximum input current is 28A; when PV1 is connected to 1 string, the maximum input current is 20A

④ Compatible with a minimum of 3 units of HS25/HS36 batteries, but if the total voltage of the 3 batteries is less than 127V and there is no PV input, the system will not able to startup

⑤ Derating above +45°C